

LUX M14C



YANMAR L70 | 1 CYL | 3000 RPM
AIR COOLED ENGINE



VERTICAL TELESCOPIC MAST
MAX HEIGHT | 5.5 m
LIFETIME WARRANTY



RATED OUTPUT | 4.2 kVA - 230V
OUTLET SOCKET | 1 kVA - 230V



FUEL CONSUMPTION | 0.50 l/h
RUNNING TIME | 40 h



LED FLOODLIGHTS | 4 X 150 W
ILLUMINATED AREA | 2600 m²



DSE3110 DIGITAL CONTROL
STANDARD LIGHT SENSOR



GALVANIZED METAL BODY
80 µm POWDER COATING

LM SERIES



MADE IN
ITALY



LUXTOWER 
lighting towers

LM Series LUX M14C

MADE IN
ITALY

TECHNICAL DATA

Rough dimensions & weight

Dimensions min.	mm	1195 X 1955 X 2200
Dimensions max.	mm	1940 X 1450 X 5500
Total weight without fuel	Kg	350

Features

Floodlight	W	4 X 150 W
Lamps type		LED
IP level		67
Wind stability	Km/h	110

Alternator

Model		Linz E1C10S F
Frequency	Hz	50
Degree of protection	IP	23
Rated output	kVA/V	4.2 - 230
Outlet socket	kVA	1

Engine

Model		Yanmar L70 1 cyl air cooled
Fuel		Diesel
r.p.m.		3000
Noise Level	db at 6 meters	65
Tank capacity	l	20
Running time	h	40
Fuel consumption	l/h	0.50



**EUROPEAN MULTI
LED FLOODLIGHTS**
IP67 DEGREE OF PROTECTION




**DSE3110
DIGITAL CONTROL**




**STANDARD
LIGHT SENSOR**

Illuminated Area // 5 lux min.

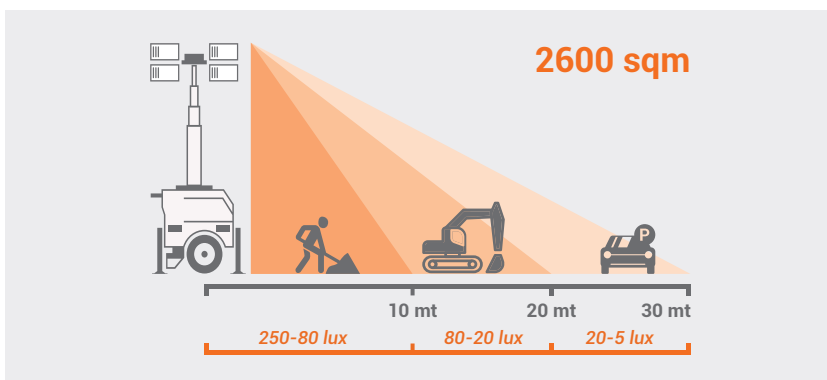

Load Delivery

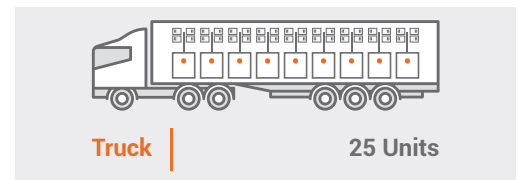

LUXTOWER
lighting towers

Luxtower: Via Strada Nuova, 28 - 27050 Codevilla (PV) ITALY | TLF. +39 0383 365544 | Fax +39 0383 49702

LUXTOWER ongoing policy is in continuous improvement. The company reserves the right to modify the technical specifications and items described in this catalogue at any time and without notice for technical or commercial reasons. Product images are shown for information only LUXTOWER® - 2016© All rights reserved.